

Indoor - Outdoor Computerized LED Signs Since 1986

Visit us at... www.sunitron.com

HERE IT IS! THE AMAZING

ADBALL®

A "Revolution" in Point of Purchase Advertising!












The *original* **Ad*Ball** LED display, is a true state-of-the-art in design and craftsmanship. It is a unique display with a circumference of 360°. Viewed from any angle, the **AD*Ball** is the most versatile promotional tool of the new millennium.







The **AD*Ball** allows visibility of it's messages in a radius of 100 feet or more. The applications are endless!. The **AD*Ball** give you the leading edge in

runs under a windows environment

Point Of Purchase display.



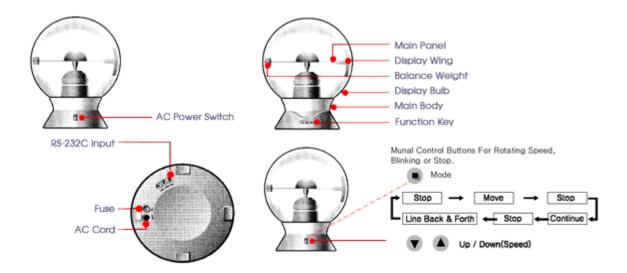





Indoor - Outdoor Computerized LED Signs Since 1988

Visit us at... www.sunitron.com

Specification			
Display method:	The image is created by scanning rotation of 32 LED's.	Globe Color:	Light Blue, Dark Blue, Clear, Ash & Red
Base Color:	Bronze & Silver	LED Color:	Amber, Green, White, Blue & Red
Communication	RS232 Hardwire (serial		PC (Windows 95/98) or
Method:	port) or Modem (via Telephone)	Control method:	Button on the panel (to select the running modes)
Display Functions:	Rotating (Move), Stop, Blinking (stop or move), Complex Speed up & down	Graphics Editor:	Editors that operate in a Windows [©] environment
Power Consumption:	Max. 40W	Input Voltage:	110VAC or 220VAC
Dimension:	Diameter = 30cm, H = 37cm	Weight:	3.7Kg
Display Height:	10cm (32dot LED Array)	Pixel Resolution:	32 Row X 256 Columns
Visibility:	360 degree	Number of Lines	1 to 4 Lines
Character per line:	Depend on fonts used (standard 135 - 140 character per line of 2 cm height)	Displaying Page:	- 15 pages CB 100 - 30 Pages CB 200
Warranty:	1 Year		





AD*Ball Certification Patent (International, Domestic) Registration of design Trademark registration (AD*Ball) Utility model Application UL Mark CE Mark EMI Mark ISO 9001/9002